




GV-5262SE-M Rev.4.2 (AB12010)

In series


The model is in series and available for the long term.



Specification

Sensor

| | |
|---|----------------------|
| Sensor type | CMOS Mono |
| Shutter | Global Shutter |
| Sensor characteristic | Linear |
| Readout mode | Progressive scan |
| Pixel Class | 2 MP |
| Resolution | 2.30 Mpix |
| Resolution (h x v) | 1920 x 1200 Pixel |
| Aspect ratio | 16:10 |
| ADC | 12 bit |
| Color depth (camera) | 12 bit |
| Optical sensor class | 1/1.2" |
| Optical Size | 11.251 mm x 7.032 mm |
| Optical sensor diagonal | 13.27 mm (1/1.21") |
| Pixel size | 5.86 µm |
| Micro lens shift | 0.00 |
| Manufacturer | Sony |
| Sensor Model | IMX249LLJ-C |
| Gain (master/RGB) | 24x/4x |
| AOI horizontal | same frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 96 / 8 |
| AOI image height / step width | 1 / 1 |
| AOI position grid (horizontal/vertical) | 8 / 1 |
| Binning horizontal | same frame rate |
| Binning vertical | same frame rate |
| Binning method | M/C automatic |
| Binning factor | 2 / 4 / 8 |
| Subsampling horizontal | same frame rate |
| Subsampling vertical | same frame rate |
| Subsampling method | M/C automatic |
| Subsampling factor | 2, 4, 8 |

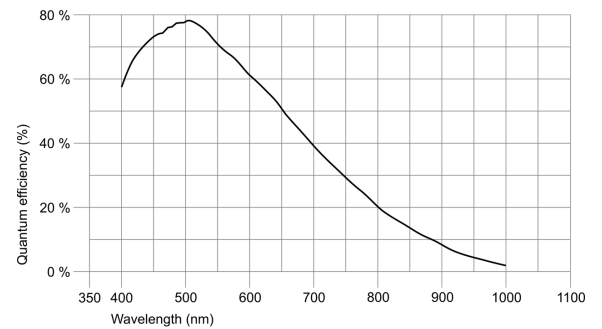

Subject to technical modifications (2023-12-18)

Page 1 of 3

www.ids-imaging.com

IDS Imaging Development Systems GmbH

Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com

Model

| | |
|---|--------------------|
| Frame rate freerun mode (in 8-bit mode) | 46 fps |
| Frame rate trigger (continuous) | 46 fps |
| Frame rate trigger (maximum) | 47 fps |
| Exposure time (minimum - maximum) | 0.031 ms - 2000 ms |
| Long exposure (maximum) | 90000 ms |
| Power consumption | 1.7 W - 2.9 W |
| Image memory | 128 MB |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.
For PCB versions, refer to the separate hints in the respective documentation.

| | |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Device temperature during storage | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 % |

Connectors

| | |
|---------------------|---|
| Interface connector | GigE RJ45 |
| I/O connector | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply | 12 V - 24 V or PoE |

Pin assignment I/O connector

| | |
|---|---|
| 1 | Ground (GND) |
| 2 | Flash output with optocoupler (-) - Line 1 |
| 3 | General Purpose I/O (GPIO) 1 - Line 2 |
| 4 | Trigger input with optocoupler (-) - Line 0 |
| 5 | Flash output with optocoupler (+) - Line 1 |
| 6 | General Purpose I/O (GPIO) 2 |
| 7 | Trigger input with optocoupler (+) - Line 0 |
| 8 | Input power supply (VCC) 12-24 V DC |



Design

| | |
|------------------|-----------------------------|
| Lens Mount | - |
| IP code | - |
| Dimensions H/W/L | 31.5 mm x 40.0 mm x 30.0 mm |
| Mass | 36 g |

Features

| | | |
|-------------------|-----------------------------|---|
| Image Acquisition | Freerun | ✓ |
| | Software trigger | ✓ |
| | Hardware trigger | ✓ |
| | Trigger controlled exposure | ✓ |
| | Denoisier | ✓ |
| | Long exposure | ✓ |
| | Line scan | ✓ |
| | Line scan highspeed | - |
| Flashing | Flashing | ✓ |
| | PWM flashing | ✓ |

Subject to technical modifications (2023-12-18)

| | | |
|---------------------------|--------------------------------|---|
| Image Adjustments | Auto exposure | ✓ |
| | Auto gain | ✓ |
| | Auto whitebalance | - |
| | Color correction | - |
| | Gamma | ✓ |
| | LUT | ✓ |
| | Mirror/flip | - |
| On-board Image Processing | Pixel formats | Mono8 Mono10 Mono10p Mono12 Mono12p |
| | Region of interest | ✓ |
| | Decimation (FPGA) | ✓ |
| | Decimation (Sensor) | - |
| | Binning (FPGA) | ✓ |
| | Binning (Sensor) | - |
| Others | IP settings | ✓ |
| | Bandwidth management | ✓ |
| | Chunks | ✓ |
| | Sequencer | ✓ |
| | PTP | ✓ |
| | Firmware update | ✓ |
| | 1st supported firmware version | 2.10 |