

Specifications for AT-140 CL


Specifications	AT-140 CL
Sensor	3 x 1/2" progressive scan CCD - ICX267AL
Pixel Clock	50 MHz
Frame rate full frame	25.21 frames/second (1040 lines per frame)
Active area	6.4 (h) x 4.8 (v) mm
Cell size	4.65 (h) x 4.65 (v) μm
Active pixels	1392 (h) x 1040 (v)
Read-out modes	Full 1392 (h) x 1040 (v) 25.21 fps 2/3 partial scan 1392 (h) x 695 (v) 33.49 fps 1/2 partial scan 1392 (h) x 521 (v) 40.04 fps 1/4 partial scan 1392 (h) x 261 (v) 56.77 fps 1/8 partial scan 1392 (h) x 131 (v) 71.38 fps Variable partial Programmable start line & height, 1 to 1040L Vertical binning 1392 (h) x 520 (v) 40.98 fps
Sensitivity (on sensor)	1.25 Lux, max gain, 50% video
S/N ratio	>50 dB. (Green ch., 0 dB gain)
Video output	3 x 8 bit RGB: single port Camera Link base 3 x 10 bit RGB: dual port Camera Link medium 3 x 12 bit RGB: dual port Camera Link medium
Auto-iris lens video	0.7 V p-p, 75 Ω NUM luminance signal w/o sync
Gain, manual	Manual for all 3 colors Master -3 to +12 dB R and B -6 to +6 dB
Synchronization	Int. X-tal
Inputs Camera Link	Ext. trigger, (LVDS)
TTL	Ext. trigger 4 Vpp ±2 V. (TTL or 75 Ω)
Outputs Camera Link	RGB 8/10/12 bit video output. Do - D9
TTL	Pixel clock, DVAL, LVAL, FVAL and EEN (LVDS) XEEN output 4 Vpp from 75 Ω source (TTL)
Trigger modes	Continuous, Edge Pre-Select, Pulse Width Control, Reset Continuous
Electronic shutter Pre-set shutter	1/25 (off) to 1/53,000 sec. in 12 steps. All or R, G, B individually
Programmable exposure	1L - 1056L in 1L (37.56 μs) steps. All or R, G, B individually
Pulse Width Control	2L (75.12 μs) to 53243L (2 sec.)
White balance	Manual, one-push auto, continuous auto, Preset(4000K, 4600K, 5600K) Note: 7800K is Factory default setting
Tracking range	-6 to +6 dB. (4000K to 9000K)
Gamma	1.0 (OFF), 0.6, 0.45 or LUT (Look Up Table)
Knee function	Knee point and knee slope for R, G, and B channel
Linear Matrix	Manual for R, G and B / Preset (sRGB, Adobe RGB)
Blemish Compensation	Up to 16 pixels
Functions controlled by Camera Link	Trigger, shutter, scanning, readout, polarity, gain, set-up, white balance, Gamma, knee point and slope, linear matrix, blemish/shading compensation
Operating Temperature	-5° C to +45° C
Humidity (operation)	20 - 80% non-condensing
Storage temp./humidity	-25° C to 60° C / 20% - 80 % non-condensing
Vibration	3G (15 Hz to 200 Hz XYZ)
Shock	50 G
Regulations	CE (EN 61000-6-2, EN 61000-6-3), FCC part 15 class B, RoHS
Power	12V to 24V DC ± 10%. 6.1W typical (full frame @ 12V)
Lens mount	C-mount (Max 4.0 mm thread)
Dimensions (H x W x L)	55 mm x 55 mm x 78.3 mm
Weight	290 g

Ordering Information

AT-140CL 1/2" 3CCD Progressive Scan RGB Color Camera

Connector pin-out

DC In / Trigger



HIROSE HR10A-10R-12PB-01

Pin	Signal
1	Ground
2	+12V DC
3	Ground
4	Iris video
5	Ground
6	—
7	—
8	Ground
9	XEEN out
10	Trigger in
11	—
12	Ground

Camera Link Interface

26 pin MDR connector 3M 10226-1A10L




Pin	Signal	Function	
1	14	GND	
2	15	X0-/X0+	CL Data out
3	16	X1-/X1+	CL Data out
4	17	X2-/X2+	CL Data out
5	18	Xclk-/Xclk+	CL Clk
6	19	X3-/X3+	CL Data out
7	20	SerTC+/SerTC-	Serial in*
8	21	SerTFG+/SerTFG-	Serial out*
9	22	CC1-/CC1+	Trigger*
10	23	CC2+/CC2-	Reserved
11	24	CC3-/CC3+	Not used
12	25	CC4+/CC4-	Not used
13	26	GND	


* Via Camera Link or 12-pin Hirose Information shown is for Port 1. For Port 2, which is used when providing 30-bit or 36-bit output via Camera Link medium configuration, pinout is similar, except pins 7-12 and 20-25 are not used.

Dimensions


Front view




Side view




Bottom view



Rear view



Spectral Response

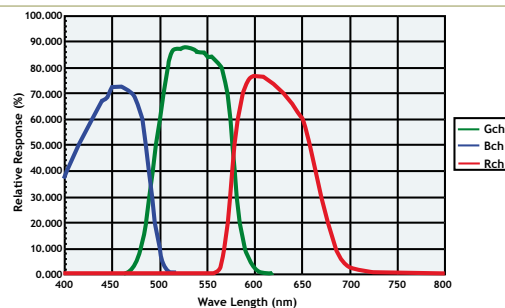

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI-A-5 cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.

Europe, Middle East & Africa
Phone +45 4457 8888
Fax +45 4491 3252

Asia Pacific
Phone +81 45 440 0154
Fax +81 45 440 0166

Americas
Phone (Toll-Free) 1 800 445 5444
Phone +1 408 383 0300

Visit our web site on www.jai.com

www.adept.net.au

See the possibilities

