



PHANTOM[®]
TMX-SERIES

**ADEPT
TURNKEY**

SMARTER IMAGING FOR BETTER LIVES

Perth: (08) 9242 5411 Melbourne: (03) 9384 1775 Sydney: (02) 9905 1551

Email: sales@adeptturnkey.com.au
Web site: www.adept.net.au



PHANTOM TMX 7510 TMX 6410 TMX 5010

HIGH-SPEED CAMERA

Up to 76,000 fps at 1280 x 800 (7510),
over 300,000 fps at 1280 x 192 and 640 x 384
Very high sensitivity

FEATURES & BENEFITS

DESIGNED FOR TRUE HIGH-SPEED APPLICATIONS

- 3 performance models offer extreme high frame rates at larger resolutions, up to 1.75 Million fps* at 1280 x 32 and 640 x 64 (TMX7510). 1 μ s minimum exposure standard, 95ns with 95nsFAST option. The TMX7510 and 6410 also can even achieve 38ns with the 38nsFAST option.
- Real data, for real results: Frame rates are actual, with no interpolation. 2 x 2 Binning Mode provides double the vertical resolution at high frame rates for added flexibility.
- Very high native light sensitivity, made possible by the back side illuminated (BSI) sensor.

FOCUS ON DATA MANAGEMENT

- Record multiple experiments with up to 512GB of memory that can be partitioned up to 511 times.
- 10Gb Ethernet is standard for the fastest data download directly from the camera's RAM buffer.
- Use the Phantom CineMag V, for up to 8TB of nonvolatile memory and fast image transfer.

**with export controlled FAST options*

IMAGE & SENSITIVITY

| | | |
|---------------------------------------|---|-------------------------|
| Sensor Type | CMOS, Back Side Illuminated (BSI) with Global Shutter | |
| Maximum Resolution | 1280 x 800 | Binned 640 x 384 |
| CAR Increments | 256 x 32 | Binned 128 x 64 |
| Pixel Size | 18.5 μm | Binned 37 μm |
| Sensor Size | 23.7 x 15.4 mm | |
| Bit Depth | 12 bit | |
| | EMVA 1288 Measurements (at 532 nm) | |
| | Standard Mode | Binned Mode |
| Quantum Efficiency % | 77.6% mono 70.9% color | 72.0% mono |
| Max. SNR (dB) | 39.4 | 45.2 |
| Absolute Sensitivity Threshold (p) | 31.8 mono 38.4 color | 98.9 |
| Saturation Capacity (e ⁻) | 8736 mono 9432 color | 33,184 |
| Temporal Dark Noise (e ⁻) | 24.18 | 70.69 |
| Dynamic Range (dB) | 51.0 | 53.4 |

- Reported measurements were taken at 532 nm with both monochrome and color cameras


- Visit: www.phantomhighspeed.com/emva for more information on EMVA 1288



Back Panel

SPECTRAL RESPONSE

Quantum Efficiency Monochrome and Color

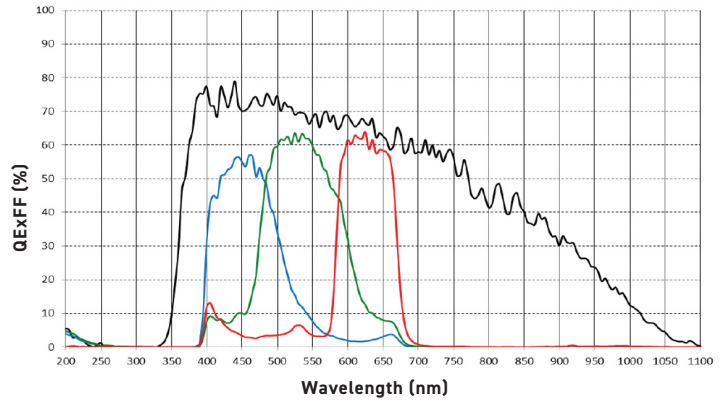

CONNECTIVITY & SIGNALS

| | | |
|----------------------|---|---------------------|
| Ethernet | 10Gb and Gigabit standard | |
| Timecode | IRIG-B modulated and un-modulated | |
| Port Descriptions | Ethernet | Locking RJ45 |
| | Power | Fischer 3-pin |
| | Battery back-up | Fischer 3-pin |
| | VF (View Finder) Power | Hirose 4-pin |
| | Range Data | Fischer 8-pin |
| | Remote | Fischer 5-pin |
| | GPS | Fischer 6-pin |
| | Capture | Fischer 12-pin |
| | USB | Yes for WiFi dongle |
| | Video output | 3G-SDI (2 BNCs) |
| Dedicated BNC | Trigger, Timecode-in, 3G-SDI | |
| Programmable I/O BNC | 4 ports | |
| I/O Signals | Programmable I/O for Fsync, Strobe, Ready, Timecode-out, Event, Memgate, Pretrigger. Assign and define signals in PCC | |
| Hardware Trigger | Dedicated BNC | |
| Software Trigger | Trigger Button, via PCC over Ethernet, Remote Port, via Image-based auto trigger (IBAT) | |
| Synchronization | External Sync via FSync or IRIG Timecode | |
| Recording Features | Burst mode, Continuous recording & AutoSave to CineMag | |
| Video Output | 3G-SDI | |
| Accessory Power | 4-pin Hirose for 12V monitors up to 1 Amp | |



| MEMORY & STORAGE | |
|----------------------|---|
| RAM Buffer | 128GB, 256GB, 512GB RAM options |
| Multi-Cine | Up to 511 Partitions |
| Non-Volatile Media | Phantom CineMag V optional. Supports auto-save, direct record and video playback. |
| Media Transfer Rates | 2TB CineMag V = 1,000 Mpx/sec 8TB CineMag V = 1,200 Mpx/sec |

| FRAME RATES & EXPOSURE | | | |
|---------------------------|---|---|--|
| Top FPS at Max Resolution | 7510: 76,000 | 6410: 65,940 | 5010: 50,725 |
| Maximum FPS | 7510: 772,050 1,750,000 with FAST options* | 6410: 758,330 1,516,660 with FAST options* | 5010: 583,330 1,166,660 with FAST option* |
| Minimum FPS | 100 | | |
| Minimum Exposure | 1 μs standard, 95ns with 95ns FAST option* (TMX 7510 / 6410) 38ns with 38ns FAST option* | | |
| PIV Features | Shutter-off mode with a straddle time of 229ns Supports Burst Mode | | |
| Exposure Features | Extreme Dynamic Range (EDR), Auto Exposure | | |

FRAME RATE CHART

Table provides examples of common resolutions and frame rates. The record times shown are for 256GB RAM at the frame rate shown. Duration will be 1/2 for 128GB and double for 512GB. Binned Mode has Mono Output Only.

| MAXIMUM FRAME RATE - FPS; (256GB RECORD TIME - SEC) | | | | | | |
|---|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Resolution (H x V) | TMX-7510 | | TMX-6410 | | TMX-5010 | |
| | Standard | Binned | Standard | Binned | Standard | Binned |
| 1280 x 800 | 76,000 (2.2) | | 65,940 (2.5) | | 50,725 (3.3) | |
| 1280 x 640 | 94,590 (2.2) | | 81,980 (2.5) | | 63,060 (3.3) | |
| 1280 x 480 | 126,500 (2.2) | | 109,630 (2.5) | | 84,330 (3.3) | |
| 1280 x 448 | 134,610 (2.2) | | 116,660 (2.5) | | 89,740 (3.3) | |
| 1280 x 384 | 156,710 (2.2) | | 135,820 (2.5) | | 104,470 (3.3) | |
| 1280 x 320 | 187,500 (2.2) | | 162,500 (2.5) | | 125,000 (3.3) | |
| 1280 x 256 | 233,330 (2.2) | | 202,220 (2.5) | | 155,550 (3.3) | |
| 1280 x 192 | 308,820 (2.2) | | 267,640 (2.5) | | 205,880 (3.3) | |
| 640 x 384 | | 308,820 (2.2) | | 267,640 (2.5) | | 205,880 (3.3) |
| 1280 x 160 | 375,000 (2.2) | | 325,000 (2.5) | | 250,000 (3.3) | |
| 640 x 320 | | 375,000 (2.2) | | 325,000 (2.5) | | 250,000 (3.3) |
| 1280 x 128 | 456,520 (2.2) | | 395,650 (2.6) | | 304,340 (3.4) | |
| 640 x 256 | | 456,520 (2.2) | | 395,650 (2.6) | | 304,340 (3.4) |
| 1280 x 96 | 617,640 (2.2) | | 535,290 (2.6) | | 411,760 (3.3) | |
| 640 x 192 | | 617,640 (2.2) | | 535,290 (2.6) | | 411,760 (3.3) |
| 1280 x 64 | 772,050 (2.7) | | 758,330 (2.7) | | 583,330 (3.5) | |
| 640 x 128 | | 772,050 (2.7) | | 758,330 (2.7) | | 583,330 (3.5) |
| FAST OPTION | | | | | | |
| 1280 x 64 | 875,000 (2.3) | | 758,330 (2.7) | | 583,330 (3.5) | |
| 640 x 128 | | 875,000 (2.3) | | 758,330 (2.7) | | 583,330 (3.5) |
| 1280 x 32 | 1,750,000 (2.3) | | 1,516,660 (2.7) | | 1,166,660 (3.5) | |
| 640 x 64 | | 1,750,000 (2.3) | | 1,516,660 (2.7) | | 1,166,660 (3.5) |


*Certain Phantom cameras are held to export licensing standards. Details available at: www.phantomhighspeed.com/export

CONTROL

| | |
|-------------------------------|--|
| Software & OS | Phantom PCC (Windows 64); SDK available for C/C++, C#, Python, MatLab and LabView |
| On-camera Controls | Standard Feature. Access menu system with encoder, viewed on video monitor. Buttons for trigger, play and save |
| Primary File Format | Phantom Cine RAW (.cine) |
| Alternative File Formats | Easily convert to formats including .mp4, Apple ProRes .mov, .avi, Tiff, JPG, PNG and many more using PCC. Cine files are directly compatible with many major video editing and motion analysis programs |
| Highlighted Software Features | Integrated Data Acquisition (NI-DAQ), DIC Calibration Support with Sync-Snapshot menu, Continuous recording, Image Processing |

MECHANICAL

| | |
|-----------------------|---|
| Housing Variants | CineMag and non-CineMag compatible variants |
| Size (Without Handle) | Non-CineMag: 7 x 7 x 11.7" (17.8 x 17.8 x 29.7 cm) CineMag: 7 x 7.4 x 11.7" (17.8 x 18.6 x 29.7 cm) |
| Weight | 20 lbs (9.1 kg) |
| Lens Mounts | F-Mount standard (aperture support for Nikon G-style lenses). Also available: Canon EF (with electronic focus and iris control), C-mount, M42-Mount |
| Mounting Points | 2 (4 total) on the bottom, 2 (4 total) on side, 4 (8 total) on handle |
| Internal Shutter | Standard, for remote black references |
| Cooling | Active cooling. Quiet mode disables fans during capture |

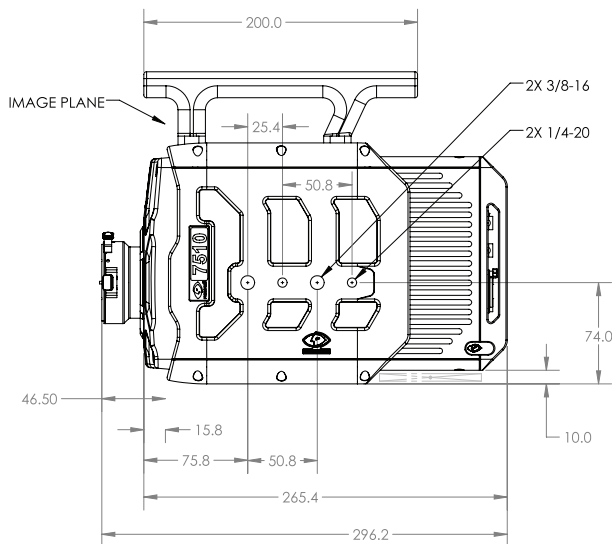

POWER

| | |
|-------------------|--|
| AC Power | 100-240 VAC, 400W power supply included |
| Voltage Range | 20-28VDC Primary and Secondary |
| Power Consumption | 325W typical, 395W maximum with accessories (Max frame rate, CineMag, View Finder, Remote) |

ENVIRONMENTAL

| | |
|-----------------------|--|
| Operating Temperature | -10 to +50°C |
| Storage Temperature | -20 to +70°C |
| Operational Shock | Rated 30G; sawtooth wave, 11ms, +/- 10 pulses all axes |
| Operational Vibration | MIL-STD-202H Method 214-i; Test Condition A. Rated 5.3 Grms; 15 min/axis |
| Regulatory | Made in the USA Emissions - CE & UKCA Compliant EN 61326-1 Immunity - CE & UKCA Compliant EN 61326-1 FCC - CFR 47, Part 15, Subpart B & ICES-0003, Class A KC Emissions - KC Compliant KN32 KC Immunity - KC Compliant KN35 Safety - IEC 60950-1 |

GLOBAL SUPPORT NETWORK

Phantom cameras are supported by Vision Research's Global Service and Support network, providing PhantomCare services from multiple sites around the globe.

ABOUT VISION RESEARCH

Focused. Since 1950, Vision Research has been designing, and manufacturing high-speed cameras. Our single focus is to invent, build, and support the most advanced cameras possible.



100 Dey Road
Wayne, NJ 07470 USA
+1.973.696.4500