




## U3-3892SE-C Rev.1.2 (AB12792)

### In series


The model is in series and available for the long term.



## Specification

### Sensor

|   |                      |
|---|----------------------|
| Sensor type                             | CMOS Color           |
| Shutter                                 | Rolling shutter      |
| Sensor characteristic                   | Linear               |
| Readout mode                            | Progressive scan     |
| Pixel Class                             | 12 MP                |
| Resolution                              | 12.00 Mpix           |
| Resolution (h x v)                      | 4000 x 3000 Pixel    |
| Aspect ratio                            | 4:3                  |
| ADC                                     | 12 bit               |
| Color depth (camera)                    | 12 bit               |
| Optical sensor class                    | 1/1.8"               |
| Optical Size                            | 7.400 mm x 5.550 mm  |
| Optical sensor diagonal                 | 9.25 mm (1/1.73")    |
| Pixel size                              | 1.85 µm              |
| Micro lens shift                        | 0.00                 |
| Manufacturer                            | Sony                 |
| Sensor Model                            | IMX226CQJ-C          |
| Gain (master/RGB)                       | 17x/15x              |
| AOI horizontal                          | same frame rate      |
| AOI vertical                            | same frame rate      |
| AOI image width / step width            | 256 / 16             |
| AOI image height / step width           | 2 / 2                |
| AOI position grid (horizontal/vertical) | 16 / 2               |
| Binning horizontal                      | increased frame rate |
| Binning vertical                        | increased frame rate |
| Binning method                          | M/C automatic        |
| Binning factor                          | 2 / 4 / 8            |
| Subsampling horizontal                  | same frame rate      |
| Subsampling vertical                    | same frame rate      |
| Subsampling method                      | M/C automatic        |
| Subsampling factor                      | 2, 4, 8              |

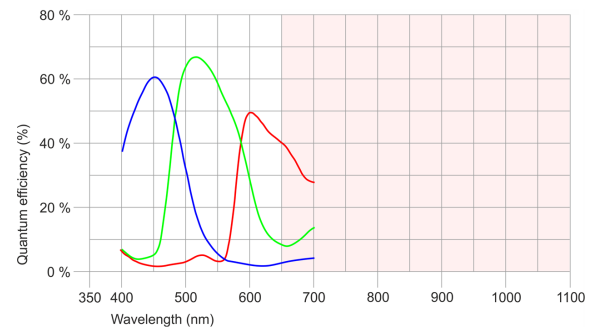

Subject to technical modifications (2023-12-14)

## Model

|   |                   |
|---|-------------------|
| Frame rate freerun mode (in 8-bit mode) | 33 fps            |
| Frame rate trigger (continuous)         | 17 fps            |
| Frame rate trigger (maximum)            | 17 fps            |
| Exposure time (minimum - maximum)       | 0.040 ms - 609 ms |
| Long exposure (maximum)                 | 30000 ms          |
| Power consumption                       | 2 W - 3.6 W       |
| Image memory                            | 128 MB            |

## Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.  
For PCB versions, refer to the separate hints in the respective documentation.


|                                     |                                 |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F   |
| Device temperature during storage   | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 %                     |

## Connectors

|                     |   |
|---------------------|---|
| Interface connector | USB Type-C                                |
| I/O connector       | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply        | USB cable                                 |

## Pin assignment I/O connector

|   |  |
|---|--|
| 1 | Ground (GND)                                 |
| 2 | Flash output with optocoupler (-) - Line 1   |
| 3 | General Purpose I/O (GPIO) 1, 3.3 V - Line 2 |
| 4 | Trigger input with optocoupler (-) - Line 0  |
| 5 | Flash output with optocoupler (+) - Line 1   |
| 6 | General Purpose I/O (GPIO) 2, 3.3 V - Line 3 |
| 7 | Trigger input with optocoupler (+) - Line 0  |
| 8 | Output supply voltage, 5 V (100 mA)          |



## Design

|                  |                             |
|------------------|-----------------------------|
| Lens Mount       | -                           |
| IP code          | -                           |
| Dimensions H/W/L | 29.5 mm x 40.0 mm x 25.0 mm |
| Mass             | 19 g                        |

## Features

|                   |                             |   |
|-------------------|-----------------------------|---|
| Image Acquisition | Freerun                     | ✓ |
|                   | Software trigger            | ✓ |
|                   | Hardware trigger            | ✓ |
|                   | Trigger controlled exposure | - |
|                   | Denoiser                    | ✓ |
|                   | Long exposure               | ✓ |
|                   | Line scan                   | - |
|                   | Line scan highspeed         | - |
| Flashing          | Flashing                    | ✓ |
|                   | PWM flashing                | ✓ |

Subject to technical modifications (2023-12-14)

Image Adjustments

|                   |   |
|-------------------|---|
| Auto exposure     | ✓ |
| Auto gain         | ✓ |
| Auto whitebalance | ✓ |
| Color correction  | ✓ |
| Gamma             | ✓ |
| LUT               | ✓ |
| Mirror/flip       | Y |

On-board Image Processing

|                     |   |
|---------------------|---|
| Pixel formats       | Mono8<br>BayerRG8<br>BayerRG10<br>BayerRG10p<br>BayerRG12<br>BayerRG12p<br>BGR8<br>RGB8<br>BGR10p32<br>RGB10p32 |
| Region of interest  | ✓   |
| Decimation (FPGA)   | ✓   |
| Decimation (Sensor) | -   |
| Binning (FPGA)      | ✓   |
| Binning (Sensor)    | 2x2<br>Horizontal and vertical binning can only be applied jointly.   |

Others

|                                |            |
|--------------------------------|------------|
| Chunks                         | ✓          |
| Sequencer                      | -          |
| Events                         | ✓          |
| Firmware update                | ✓          |
| 1st supported firmware version | 2.20.17746 |